




## EM300-S DOUBLE

The EBELCO 300 series electromagnetic locks are renowned with its excellent holding force and the remarkable features.

The series compliance to CE and PSB Test are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with maximum quality and reliability.




### SPECIFICATIONS:

- ▶ **Voltage Input** : 12 VDC / 24 VDC (per Magnet)
- ▶ **Current Draw** : 12V / 300mA ; 24V / 150mA (±5%)
- ▶ **Holding Force** : Up to 300 lbs x2 (136 kg x2)
- ▶ **Anti-Rust Surface Treatment** : Blue Zinc Plating
- ▶ **Operating Temperature** : 0~55° C ( 32~131° F)
- ▶ **Operating Humidity** : 0~95% ( non condensing)
- ▶ **Weight ( Magnet)** : 1.2 kg (±1%)
- ▶ **Dimensions** : Magnet - (L)340x(W)35x(T)21 mm  
Armature - (L)130x(W)33x(T)11 mm



### FEATURES:

- ▶ **Ideal for Double Swing Doors**
- ▶ **Dual Voltage Selectable (12 VDC or 24 VDC)**
- ▶ **Low Current Consumption**
- ▶ **Reliable Holding Force**
- ▶ **Durable and Silence Operation**
- ▶ **Cosmeticize Anodized Aluminum Casing**
- ▶ **Surge & Spike Protection PCB**
- ▶ **Full Range of Optional Brackets**
- ▶ **Zero Residual Magnetism Design**

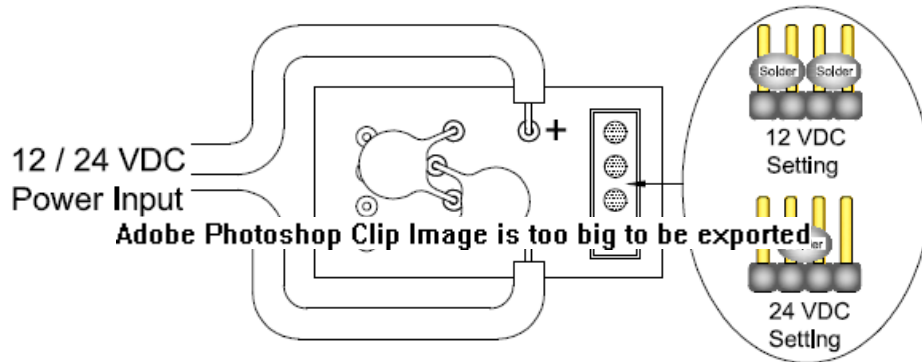

### Notice :

The factory default voltage setting is 12 VDC.

### Disclaimer :

EBELCO reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

**SECURITY . QUALITY . RELIABILITY**