




0 SEC 2.5 SEC 6 SEC 9 SEC

**AUTO RE-LOCKING TIMER SETTING**

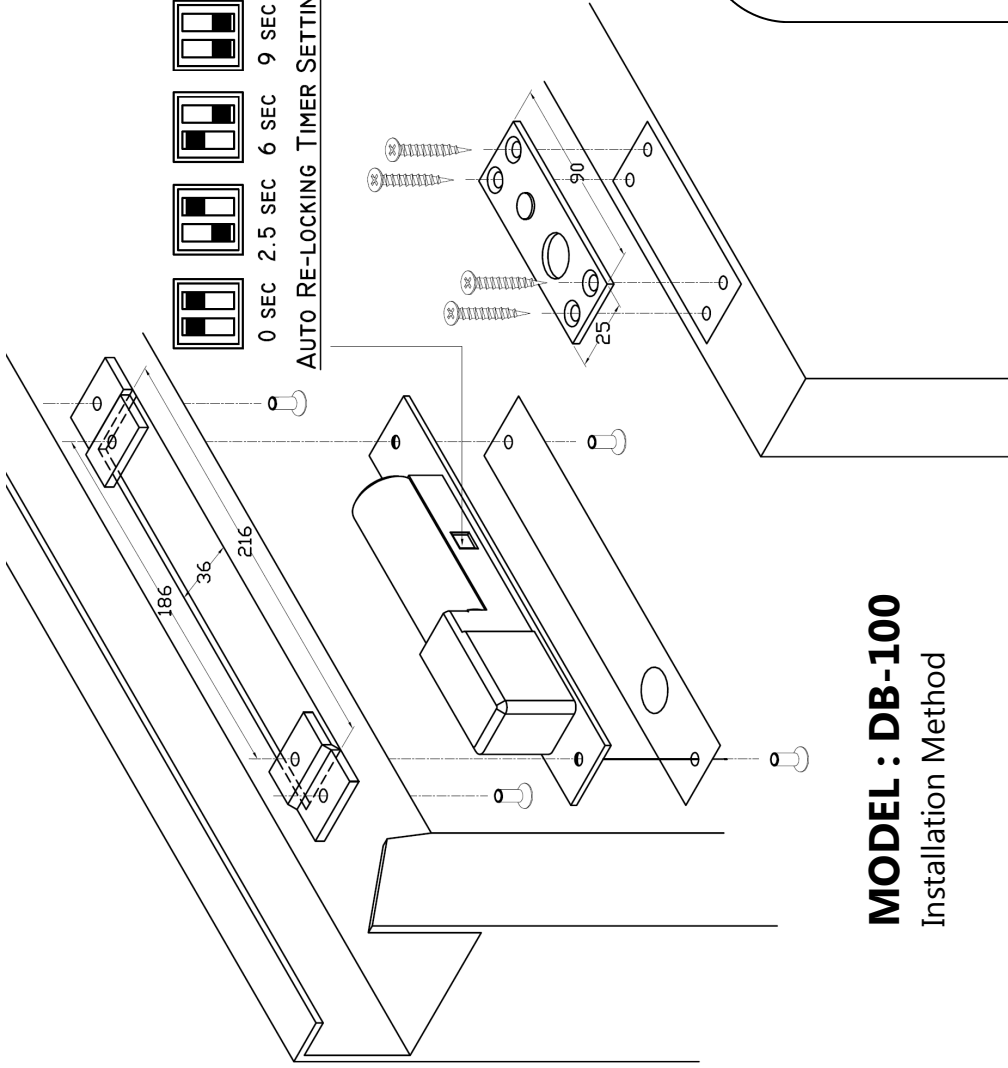

**Specification :-**


1. Voltage Input : 12 VDC
2. Wiring : Red > Positive (+)  
Black > Ground (-)  
White > Common (COM) & Normally Close (NC)
3. Solenoid : Continuous Duty
4. Current Draw : 12VDC > Start 1000mA ; Standby 100mA
5. Automatic Dead Bolt : Standard on all models
6. Fail Safe : Locked when energized (Powered to lock)

**MODEL : DB-100**

Installation Method

**Package Includes :-**

- 1) Cutout x 1 (210 x 35mm)
- 2) Cover Plate x 1 (215 x 42 x 0.8mm)
- 3) Face Plate x 1 (205 x 35 x 3mm)
- 4) Strike x 1 (90 x 25 x 27mm)
- 5) Mounting Hardware - 2pcs x Ext. Plate  
4pcs x M/C Screw M4 x 10  
6pcs x S/T Screw #4 x 1"

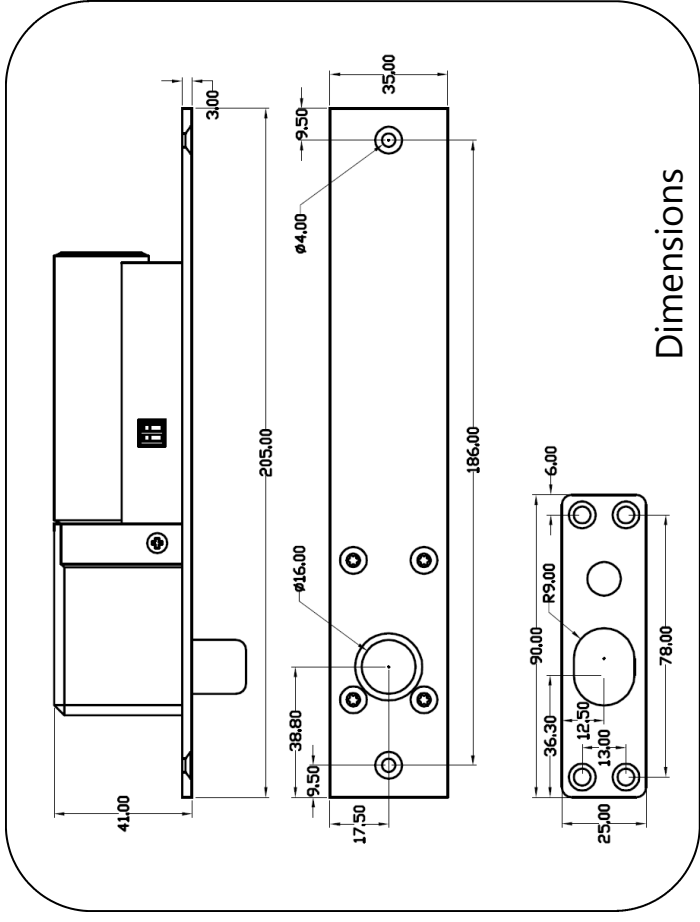

Dimensions